


## Item # AM-10Z, AM & AB Series Male Rod Ends, High Strength Alloy - Precision (Ptfе Liners Available)

- Body - Alloy Steel, heat treated, protective coated for corrosion resistance.
- Race - Alloy steel, heat treated, protective coated for corrosion resistance (Low carbon steel with PTFE liners).
- Ball - Alloy steel, heat treated, hard chrome plated.
- Units in this series will be magnafluxed on special request only. Specify by adding suffix "M". Ex.: AM-8M.
- Units are supplied without grease fittings. When a grease fitting is required, specify by adding suffix "Z" or "F". Ex.: AM-6Z = Zerk Type Fitting AM-6F = Flush Type Fitting.
- Load ratings apply only to rod ends without grease fittings. For load ratings with fittings, please consult our engineering department.
- Studded configuration available upon request. Specify by adding suffix "S". Ex.: AM-8S.
- Ptfе Liners available upon request. Specify by adding suffix "T". Ex.: AM-8T.



[larger image](#)

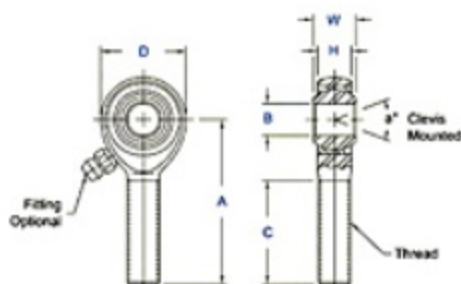

[larger image](#)

### Specifications

<b>Thread Type</b>	Right Hand
<b>Thread Configuration</b>	Male
<b>B - Ball Bore</b>	.6250 in
<b>W - Ball Width</b>	.750 in
<b>H - Head Width</b>	.562 in
<b>A - Base to Center</b>	2.625 in
<b>D - Head Diameter</b>	1.500 in
<b>Ball Diameter</b>	1.125 in
<b>C - Thread Length</b>	1.625 in
<b>Thread Size</b>	5/8-18
<b>Thread Class</b>	UNF-3A
<b>a - Misalignment Angle Clevis Mounted</b>	16 °
<b>Ultimate Radial Static Load Capacity</b>	Consult Engineering Department
<b>Approximate Brg. Weight</b>	.382 lb
<b>Options</b>	Stud
<b>Type of Lubrication</b>	Zerk Fitting