Item # XB-4Z, XM & XB Series Male Rod Ends, Extra Strength - Heavy Duty Shank (Ptfe Liners Available)

- Body - Carbon Steel protective coated for corrosion resistance.
- Race - Alloy steel, heat treated protective coated for corrosion resistance. (Carbon steel with Ptfe liners).
- Ball - Alloy steel, heat treated, hard chrome plated.
- All sizes solid shank type.
- Grease Fitting available for all sizes. Units are supplied without grease fittings. When a grease fitting is required, specify by adding suffix "Z" or "F". Ex.: XM-6Z = Zerk Type Fitting XM-6F = Flush Type Fitting.
- Load ratings apply only to rod ends without grease fittings. For load ratings with fittings, please consult our engineering department.
- Studded configuration available upon request. Specify by adding suffix "S". Ex.: XM-8S.
- Ptfe Liners available upon request. Specify by adding suffix "T". Ex.: XM-8T.

larger image

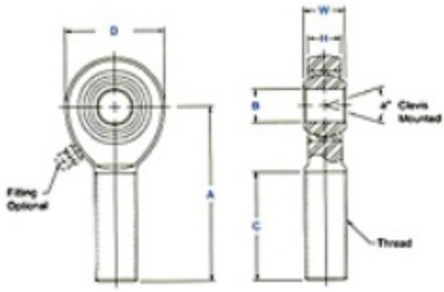

larger image

Specifications

Thread Type	Left Hand
Thread Configuration	Male
B - Ball Bore	.2500 in
W - Ball Width	.375 in
H - Head Width	.281 in
A - Base to Center	1.875 in
D - Head Diameter	.875 in
Ball Diameter	.500 in
C - Thread Length	1.250 in
Thread Size	5/16-24
Thread Class	UNF-3A-LH
a - Misalignment Angle Clevis Mounted	13 °
Ultimate Radial Static Load Capacity	Consult Engineering Department
Approximate Brg. Weight	.072 lb
Options	Stud
Type of Lubrication	Zerk Fitting

XM & XB Note

-All sizes solid shank type.
- Grease Fitting available for all sizes. Units are supplied without grease fittings. When a grease fitting is required, specify by adding suffix "Z" or "F". Ex.: XM-6Z = Zerk Type Fitting XM-6F = Flush Type Fitting.
- Load ratings apply only to rod ends without grease fittings. For load ratings with fittings, please consult our engineering department.
- Studded configuration available upon request. Specify by adding suffix "S". Ex.: XM-8S.
- Ptfe Liners available upon request. Specify by adding suffix "T". Ex.: XM-8T.